


Minisilver

CELCO® PROFIL
EVERYWHERE CONNECTIONS



Slip ring with compact and ergonomic structure, suitable for application where reduced dimensions are required. The contact pairing material and its shape makes the signal transmission reliable and continuative even in application where precision is required in the transmission of the signal (fieldbus: profibus, ethercat). With through hole.

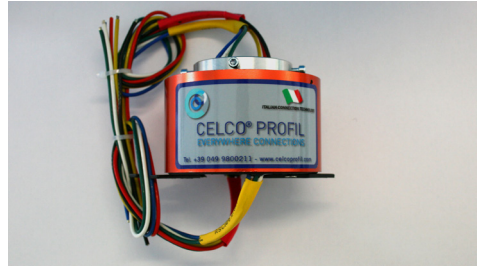

Technical specifications:

- Circuit resistance 100 mΩ
- Insulation resistance 100 MΩ
- Silver/silver contact
- Noise 30 mΩ
- Standard degree of protection IP51

Applications:

- Antennas
- Components for electrical tests
- PLC control systems
- Robotics
- Medical equipment

Modello	N° Anelli	Foro (mm)	Diam (mm)	H (mm)	Anelli Potenza	Anelli Segnale	Max RPM
MS1254-6	6	12	54	33.4	-	6x5Amp	500
MS1254-12	12	12	54	47.3	-	12x5Amp	500
MS1254-18	18	12	54	61.3	-	18x5Amp	500
MS1254-24	24	12	54	75.2	-	24x5Amp	500
MS2578-6p	6	25.4	78	55	6x10Amp	-	500
MS2578-12s	12	25.4	78	55	-	12x2Amp	500
MS2578-12p	12	25.4	78	79	12x10Amp	-	500
MS2578-(6p+12s)	18	25.4	78	79	6x10Amp	12x2Amp	500
MS2578-24s	24	25.4	78	79	-	24x2Amp	500
MS2578-18p	18	25.4	78	103	18x10Amp	-	500
MS2578-(12p+12s)	24	25.4	78	103	12x10Amp	12x2Amp	500
MS2578-(6p+24s)	30	25.4	78	103	6x10Amp	24x2Amp	500
MS2578-36s	36	25.4	78	103	-	36x2Amp	500
MS2578-24p	24	25.4	78	127	24x10Amp	-	500

