


# Modular slip ring

CELCO® PROFIL  
EVERYWHERE CONNECTIONS



The modular brush slip ring is made of glass-filled nylon sectors which can be combined in finished units with a customizable number of rings. Thanks to this composition, its main feature is its modularity which guarantees a more flexible warehouse management, combining the stored items in accordance with your real needs. Being an industrialized product with injection-moulded parts, the degree of finish is very high.

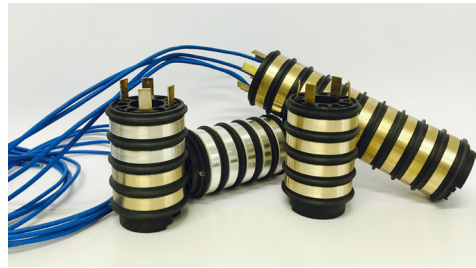

## Technical specifications:

- As it does not require additional finish, thanks to the type of industrialization, it's an entry level slip ring
- Output: FASTON, WIRE, FASTON+WIRE (wire section 1mmq)
- Rings: Brass
- Available rings with silver/gold treatment
- Standard degree of protection: IP00
- Standard model has a top terminal, on request it's possible to have a low terminal for smaller dimensions.

## Applications:

Given its flexibility of application, the sectors in which it can be used are multiple:

- Machines with positioning rotation
- Printing machines
- Packaging
- Bottling
- Flexographic printing machines
- Wrapping machine for stretch film

Model	Rings N°	H (mm)	Outer diam (mm)	Inner diam (mm)	Current Amp. a 240 VAC	V (AC/OD)	Fixing screw
XCC40-0218BA	2	40,3	40	18	20	400	n°2 M3
XCC40-0418BA	4	66,3	40	18	20	400	n°2 M3
XCC40-0618BA	6	92,3	40	18	20	400	n°3 M3
XCC40-0818BA	8	118,3	40	18	12	400	n°3 M3
XCC40-1018BA	10	144,3	40	18	12	400	n°3 M3
XCC40-1218BA	12	170,3	40	18	10	400	n°3 M3

